# ResoThermchip®



# Product Information & Technical Data Sheet

Resonate's ResoThermchip@ are a range of CNC grooved chipboards suitable for underfloor heating applications. The high performance boards are available in 1200mm and 2400mm lengths, and finished with a foil facing depending on your project requirements.

### **Cost Effective Underfloor Heating**

ResoThermchip@ boards provide extremely efficient and high performance underfloor heating for building occupants. They are ideal for all types of developments including residential, care homes and offices.

This system is ideal for replacing existing floor boarding on timber joisted floors as it has minimal impact on floor heights.

## Structural Testing

ResoThermchip@ has been tested in accordance with:

BS EN 1195:1998 BS EN 12871:2013


Ultimate Floor Load, F max = 6.62kN

\*Safety factor of 50% should be applied to above value

#### **Testing Parameters**

Timber joists = 150mm x 47mm at 600mm centres ResoThermchip@ = 22mm thick; 16mm rout at 150mm centres ResoBACKER = 6mm thick; glued and screw at 150mm centres

# **Key Benefits**

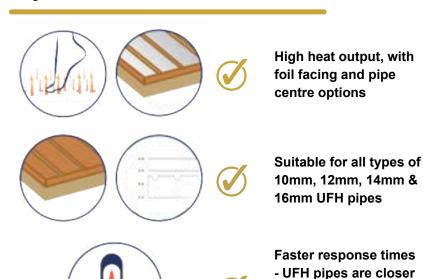



**Moisture Absorption** 

0.6%

to surface finish than

below) installation

traditional FFB (fit from

# **Product Applications**



#### **Solid Timber Joisted Floor**





- 1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
- 2. ResoBACKER Cement Fibre coverboards
- 3. Resonate ResoThermchip@
- 4. ResoEdge L30 flanking strip
- 5. Timber floor joists (max 600mm centres)
- 6. Resocified 50mm soundproofing wool
- 7. 30mm Resolar resilient bars
- 8. 2 x 15mm acoustic plasterboard