



# ResoEdgeRoll

## Product Information & Technical Data Sheet

Resonate's **ResoEdgeRoll** are high performance straight edge acoustic flanking strips. They are installed in conjunction with our acoustic flooring and wall lining products to isolate the treatments from walls, skirting boards and all abutments, reducing the risk of flanking transmission occurring and acoustic failure.

### Essential Soundproofing


**ResoEdgeRoll** are an essential component of an acoustic system, failure to install them can result in Part E regulation failure.

Available in multiple lengths, widths and thickness' **ResoEdgeRoll** can be used in conjunction with various Resonate floor and wall products. Our technical team are available to advise you on the most suitable combination for your project



### System Components

1. Resonate **ResoEdgeRoll** acoustic flanking strips

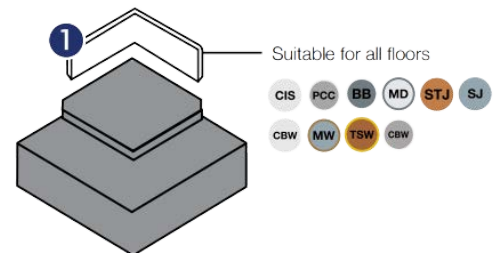

### Dimensions

#### Strip Size

5mm x 100mm x 25m  
5mm x 150mm x 50m  
5mm x 100mm x 50m  
5mm x 60mm x 50m

#### Working Temperature

-40 / 60 degrees C

#### Water Absorption

0.02 - 0.03 mg/cm<sup>2</sup>


#### Material

Extruded closed cell polylene foam

#### Colour

White

### Key Benefits



**Isolate floors and walls to prevent floors failing Part E sound testing**



**Available in multiple widths**



**Light weight, easy to handle and quick to install**



**100% recyclable  
Zero VOC's, Zero CFC's  
Zero ODPs, GWP <5**