

GYPDECK 18

Product Information & Technical Data Sheet

GYPDECK 18 is a high density, 'dry screed' panel for floors. As a dry screed system they offer significant time saving benefits over wet screed flooring solutions.

The low thermal resistance of the GYPDECK18 boards also makes them hugely effective when used in underfloor heating applications.



Soundproofing & Underfloor Heating

GYPDECK18 combined with ResoTherm insulation boards, and ResoFleece creates a complete acoustic and underfloor heating system. For these reasons the panels are ideal for student accommodation, care homes, residential properties and care facilities.



Key Benefits



Excellent impact and airborne sound reduction*



Low thermal resistance for optimum floor heating conditions**



High density boards accept ceramic and porcelain floors directly without a decoupling mat




Dry system reduces build times. Does not burn when exposed to fire (non-combustible)



System Components

1. GYPDECK18 floor panel
2. ResoEdge flanking strip
3. ResoThermXPSrouted insulation
4. ResoFleece polyester resilient layer
5. GYPDECKAdhesive

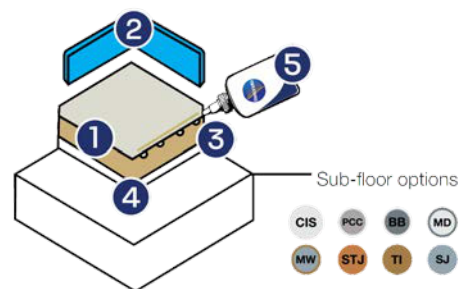

Dimensions

Panel Dimensions 18mm (H), 600mm (W)
1200mm (L)

Panel m² 0.72 m² Per Panel

Panels Per Pallet 50 Panels / 36m²

Thermal Conductivity 0.038 W/mk

Density 1200 kg/m³

*When installed as an acoustic system

**When installed as an underfloor heating system

Robust Detail Compliant

E-FC-1 (FFT 4)

E-FC-2 (FFT 4)

E-FS-1 (FFT 4)

GYPDECK 18 +ufh

Product Information & Technical Data Sheet

GYPDECK 18 +ufh is a complete under floor heating and acoustic system. GYPDECK 18 dry screed panels are installed in conjunction with ResoThermXPS® insulation boards, and ResoFleece to deliver a high performance acoustic and underfloor heating system.

Perfectly suited for residential properties, leisure complexes and care facilities an underfloor heating system featuring GYPDECK18+ufh provides all round floor performance. The system is installed directly below the floor finish, providing optimum living conditions for occupants.

Excellent Acoustics, Efficient UFH













The GYPDECK18 panels feature low thermal resistance, enabling optimum underfloor heating performance. The ResoThermXPS® CNC routed insulation panels have high compressive strength XPS, ideal for areas with heavy foot traffic.

18mm ultra high density GYPDECK18 gypsum fibre panel

The pre-grooved ResoThermXPS® insulation boards (18-50mm) are suitable for all types of underfloor heating pipes (12-16mm)

10mm ResoFleece is a high performance resilient layer technically bonded below ResoThermXPS® insulation boards


Key Benefits

			Excellent impact and airborne sound reduction*
			Low thermal resistance for optimum floor heating conditions**
			High density boards accept ceramic and porcelain floors directly without a decoupling mat
			Dry system reduces build times. Does not burn when exposed to fire (non-combustible)



System Components

1. GYPDECK18 floor panel
2. ResoTherm flanking strip
3. ResoThermXPS® routed insulation
4. ResoFleece polyester resilient layer
5. GYPDECK Adhesive

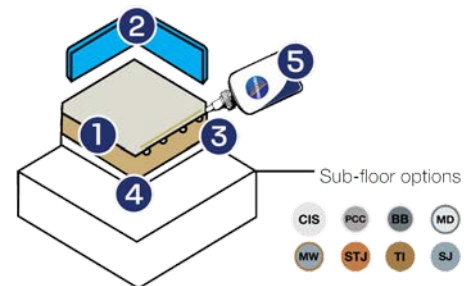

Dimensions

Panel Dimensions (GYPDECK 18)	18mm (H), 600mm (W) 1200mm (L)
Panel m²	0.72 m² Per Panel
Panels Per Pallet	50 Panels / 36m²
Thermal Conductivity	0.038 W/mk
Density	1200 kg/m³
Panel Dimensions (ResoTherm XPS)	600mm / 1200mm (W) 1200mm / 2400mm (L) 18mm, 20mm, 25mm, 30mm, 25mm, 35mm 50mm, 75mm, 100mm
Dimensional Tolerances	(+/- 1mm)
Compressive Strength	200kPa / 300kPa
Moisture Absorption	0.6%

Robust Detail Compliant

E-FC-1 (FFT 4)

E-FC-2 (FFT 4)

E-FS-1 (FFT 4)

Product Applications and Typical Acoustic Performances

Concrete In-situ Floor CIS




1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. GYPDECK18 floor panel
3. UFH pipes laid in ResoThermXPS insulation
4. ResoThermEdge flanking strip
5. ResoFleece polyester fibre resilient layer
6. Levelling compound to achieve SR2 flatness
7. 200mm Reinforced insitu concrete slab
8. MF Ceiling (min 100mm void)
9. 1 x 9.5mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	51dB
Impact Sound Performance LnT,W	47dB
Impact Noise Improvement ΔLw	24dB



Metal Web Timber Joisted Floor MW

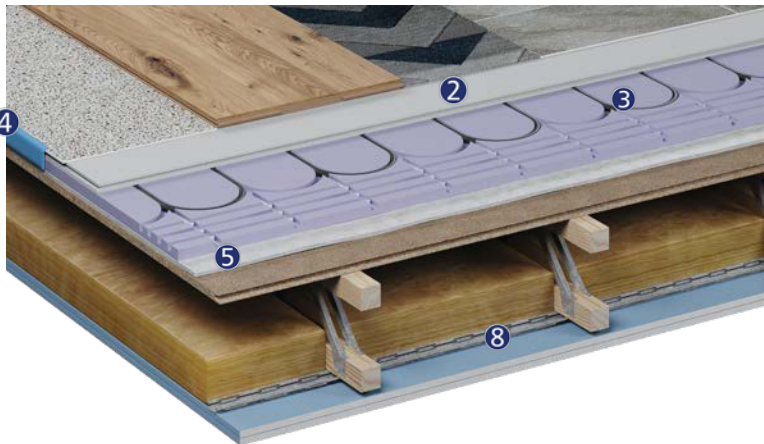


1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. GYPDECK18 floor panel
3. UFH pipes laid in ResoThermXPS insulation
4. ResoThermEdge flanking strip
5. ResoFleece polyester fibre resilient layer
6. 225mm (min) metal web timber joist
7. 100mm 45kg/m³ mineral wool
8. 30mm ResoBar resilient bars
9. 2 x 15mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	50dB
Impact Sound Performance LnT,W	56dB



Steel Joisted Floor SJ

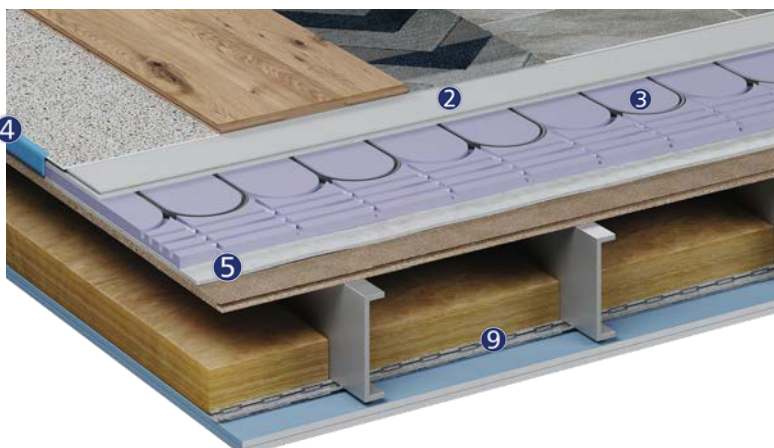

1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. GYPDECK18 floor panel
3. UFH pipes laid in ResoThermXPS insulation
4. ResoThermEdge flanking strip
5. ResoFleece polyester fibre resilient layer
6. 18mm (min) timber sub floor
7. 225mm (min) steel floor joists
8. 100mm 45kg/m³ mineral wool
9. 30mm ResoBar resilient bars
10. 2 x 15mm acoustic plasterboard


Airborne Sound Performance DnT,w + Ctr	50dB
Impact Sound Performance LnT,W	56dB



Product Applications and Typical Acoustic Performances

Profiled Metal Deck Floor

MD

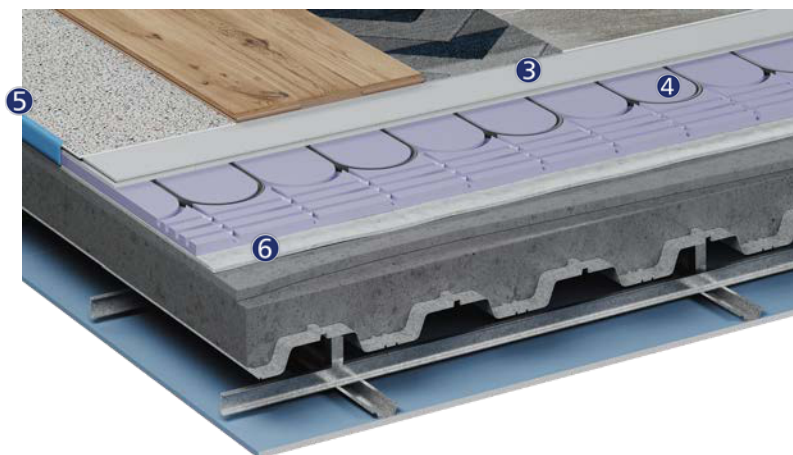


1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. Adhesive or decoupling layer
3. Resonate **GYPDECK18** floor panel
4. UFH pipes laid in **ResoThermXPS** insulation
5. **ResoThermEdge** flanking strip
6. **ResoFleece** polyester fibre resilient layer
7. Levelling compound to achieve SR2 flatness
8. 130mm concrete on profiled metal deck
9. MF Ceiling (min 100mm void)
10. 1 x 9.5mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	52dB
Impact Sound Performance LnT,W	47dB



Timber I-Joisted Floor

TI

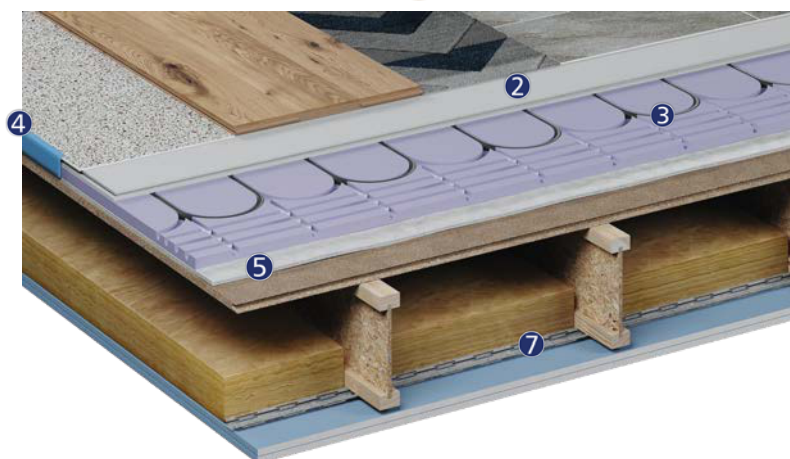

1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. **GYPDECK18** floor panel
3. UFH pipes laid in **ResoThermXPS** insulation
4. **ResoEdge L30** flanking strip
5. **ResoFleece** polyester fibre resilient layer
6. 225mm (min) metal web timber joist
7. 30mm **ResoBar** resilient bars
8. 100mm 45kg/m³ mineral wool
9. 2 x 15mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	50dB
Impact Sound Performance LnT,W	56dB

